

Installation Of Competition Horizontal Bar TQ1002



Precautions for use


- 1. For gymnastic only, It should be used under the guidance and supervision of professionals;
 - 2. Children under 10 years of age are not allowed to use it;
- 3. It shall not be used by more than one person at the same time, maximum load 500Kg;
 - 4. For indoor use only;
 - 5. Please install and use special protective mat;
- 6. Before using, check all parts of the equipment with good condition, lock firmly, Replace the parts in case of damage;
 - 7. In case of abnormal sound and loose parts, stop using immediately;
 - 8. No adjustment during use;
 - 9. The bar cannot be excessive polished;
 - 10. The surface of bar should be care and timely cleaning;
 - 11. Warm up before using the equipment, stop using if you feel unwell;
 - 12. No knock and scratch with hard object;
 - 13. Wipe the surface of equipment with neutral detergent and clean water.

Product Introduction

This competition horizontal bar can be used for competition and training. The inner regulating tube adopts chrome-plated technology, which is wear-resistant and easy to install. The locking parts clamp firmly and reliably, and the installation is convenient. The equipment is very safe and stable. The bar has has strong elasticity, which can meet the professional needs of competition and training.


Product Parameter:

- 1. The outline dimension of the competition horizontal bar is 2.46m x 0.18m, height adjustable from 2.7m to 3.05m.
- 2. Diameter of the bar is 2.8cm, length 240cm.

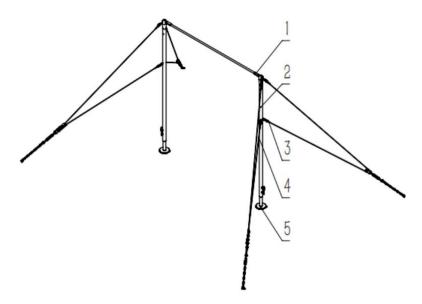


1. bar. 2.column. 3.wire rope 1 4.wire rope 2 5.floor plate



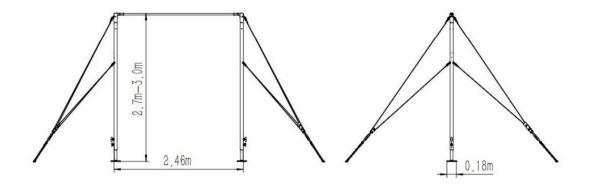

Installation Instructions:


Packing list:

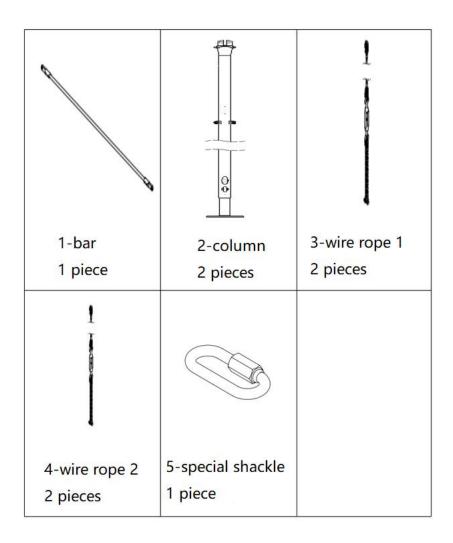

Installation Procedure:

- 1) Place the columns on level and firm ground for easy installation.
- 2) As shown in the figure below, install 1-bar onto the two columns. Make sure the bar is stuck into 5-mounting parts. And then connect the special shackles to A-connecting plate and B-wire rope loop.

Note: The columns are packaged and transported as a whole and has been installed before delivery.

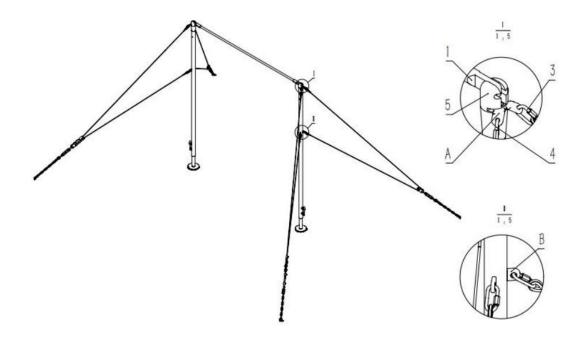


3) Connect the other ends of the wire ropes to the floor anchors via special shackles. Tension the wire rope by hand as hard as you can.

Tension adjustment of wire ropes: Rotate 2-turnbuckles in the direction shown in the figure below (opposite direction to release) to adjust the tension to the



appropriate degree. And then tighten the rope tightener to an appropriate tightness.

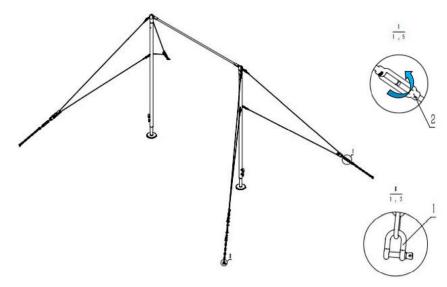


Instruction for use

This product is specially used for horizontal bar competition and training.

Adjustment Description:

As shown in the figure below, firstly loosen 9-locking part, at the same time, pull 8-gear component outward, and then move the inner adjusting pipe to the appropriate height, finally, fix the wire rope on the ground anchor.

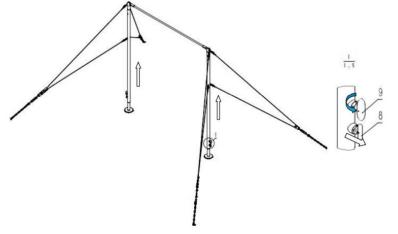

Web: www.taishansports.cn



Maintenance:

- 1) During the use, all the connecting parts of the product should be checked regularly for looseness and falling off. If found, they should be tightened or replaced in time to ensure the safety of use.
- 2) When there are stains on the bar, wipe the bar gently with towel dipped in a little water.
- 3) After one year of use, it is recommended to use the product after professional inspection.

Quality Guarantee:

1) The warranty period (from the date of delivery) of the equipment is shown in the table below:

No.	Name	Warranty period	Note
1	Horizontal bar	3 years	Exclude the gear parts and locking parts.
2	Gear parts	1 year	
3	Locking parts	1 year	

- 2) Equipment damage caused by improper use or failure to maintain as required shall be borne by users themselves.
- 3) The equipment surface coating damage caused by scratch or bump is not



covered by the warranty.

4) Beyond the warranty period, we provide free technical support service and paid on-site maintenance service.

Spare Parts:

No.	Name	Specification	Qty.	Note
1	O-shape shackle	M10	1	Spare parts